

HOMESURE Master touch

दीवारों के दीवाने



**SUPERIOR
FINISH**



**RICH
COLOUR**



**LONG
LASTING**

Primer
(Interior & Exterior)

Distemper

Emulsion
(Interior & Exterior)

PRIME EXTERIOR PRIMER

Mastertouch Prime Exterior Primer provides excellent whiteness and superior adhesion, ensuring durable, long-lasting protection for exterior walls. Ideal for use as a base coat before topcoat application, it enhances the overall finish and longevity of your exterior paint.

Available in 1, 4, 10 & 20 Lt.



FEATURES



Excellent Workability



Free from Heavy Metal



Algae & Fungal Resistant



Excellent Adhesion



Superior Coverage



Smooth Brushability

SUBSTRATE

All kind of well prepared exterior plasters, concrete and masonry surfaces.

COVERAGE

70 - 85 sq. ft. / Lt. / Coat (may vary on surface condition & temperature).

SHELF LIFE

24 months from date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Cost-Effective
- Ease of Application
- Enhances Finish of the Topcoat
- Low VOC Product

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	600 - 700 ml of clean water/ 1 Lt. of Primer.
Application	Brush & Roller.
Drying time	Surface Dry: 60 min. Re - Coatability: 6 - 8 hours.
Finish	Matt & Smooth.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guideline refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contamination
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guideline refer HomeSure WallEX Crack Filler TDS)

MIXING

- Dilution: 100% with clean water
- Ensure proper mixing of water in material before application

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Prime Exterior Primer with proper dilution and allow to dry for 6 - 8 hours before topcoat application
- Application can be done by using brush and roller

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- Only one coat required
- Mastertouch Prime Exterior Primer contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



PRIME INTERIOR PRIMER

Mastertouch Prime Interior Primer offers exceptional whiteness, a smooth surface, and superior adhesion, ensuring a flawless topcoat application. Perfect for achieving a pristine & cost-effective finish. It enhances the durability and appearance of your interior walls.

Available in 1, 4, 10 & 20 Lt.



FEATURES



Excellent Workability



Free from Heavy Metal



Algae & Fungal Resistant



Excellent Adhesion



Superior Coverage



Good Opacity

SUBSTRATE

All kind of well prepared interior plasters, concrete and masonry surfaces.

COVERAGE

80 - 100 sq. ft / Lt. / Coat (may vary on surface condition).

SHELF LIFE

24 months from date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Good Whiteness
- Better Coverage
- Eco Friendly
- Smooth Finish
- Improved Top Coat Adhesion

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	100% clean water.
Application	Brush & Roller.
Drying time	Surface Dry: 60 min. Re - Coatability: 6 - 8 hours.
Finish	Matt & Smooth.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WalliEX Ready Mix Plaster (for guideline refer HomeSure WalliEX Ready Mix Plaster TDS)
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contamination
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure Crack Filler (for guideline refer HomeSure WalliEX Crack Filler TDS)

MIXING

- Dilution: 100% with clean water
- Ensure proper mixing of water in material before application

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Prime Interior Primer with proper dilution and allow to dry for 6 - 8 hours
- Apply two coats of HomeSure Wall Putty (for guideline refer HomeSure Wall Putty TDS). Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean
- Apply again one coat of Mastertouch Prime Interior Primer with proper dilution and allow to dry for 6 - 8 hours before topcoat application
- Application can be done by using brush and roller

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- Two coats required
- Mastertouch Prime Interior primer contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



EXTERIOR PRIMER

Mastertouch Exterior Primer is water thinnable wall primer specially featured with ease of application and fast drying properties. It enhances the surface smoothness and provides good adhesion to the topcoat.

Available in 1, 4, 10 & 20 Lt.



FEATURES



Excellent Workability



Free from Heavy Metal



Algae & Fungal Resistant



Excellent Adhesion



Superior Coverage



Smooth Brushability

SUBSTRATE

Mastertouch Exterior Primer is suitable on new or previously painted masonry surfaces such as brickwork, plaster, cement, rendering and semi-permanent interior finishes.

COMPOSITION

- Pigment: Non-lead Pigments
- Extenders: Non-lead Fillers
- Binder: Styrene-Acrylic Emulsion
- Solvent: Water

SHELF LIFE

24 months from date of manufacturing in original tightly closed containers. To be kept away from direct sunlight and excessive heat.

PRODUCT BENEFITS

- Value for Money
- Easy Application
- Eco Friendly
- Prevent peeling of top coat

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	Apply 1:1 by volume & for best performance use 50% with clean water.
Application	Brush, Roller & Spray.
Coverage	80 - 100 sq. ft. / Lt. / Coat (may vary on surface condition).
Drying time	Surface Dry: 30 min. Re - Coatability: 3 - 4 hours.
Finish	Matt & Smooth.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guidelines refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guidelines refer HomeSure WallEX Crack Filler TDS)

MIXING

- Dilution: 100% with clean water
- Ensure proper mixing of water in material before application

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Exterior Primer with proper dilution and allow to dry for 4 - 6 hours before topcoat application
- Application can be done by using brush, roller or spray

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- Only one coat required
- Mastertouch Exterior Primer contains non-toxic material but still, it is important to wear a safety kit mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



INTERIOR PRIMER

Mastertouch Interior Primer is water thinnable wall primer specially featured with ease of application and fast drying properties. It enhances the surface smoothness and provides good adhesion to the topcoat. Available in 1, 4, 10 & 20 Lt.



FEATURES



Excellent Workability



Free from Heavy Metal



Algae & Fungal Resistant



Excellent Adhesion



Superior Coverage



Good Opacity

SUBSTRATE

Mastertouch Interior Primer is suitable on new or previously painted masonry surfaces such as brickwork, plaster, cement, rendering and semi-permanent interior finishes.

COMPOSITION

- Pigment: Non-lead Pigments
- Extenders: Non-lead Fillers
- Binder: Styrene-Acrylic Emulsion
- Solvent: Water

SHELF LIFE

24 months from date of manufacturing in original tightly closed containers. To be kept away from direct sunlight and excessive heat.

PRODUCT BENEFITS

- Value for Money
- Easy Application
- Eco Friendly
- High Durability

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	1 : 1 (100% clean water)
Application	Brush & Roller or Spray
Coverage	130 - 150 sq.ft./Lt./coat (may vary on surface condition)
Drying time	4-6 hours
Finish	Smooth & Matt.
Stability	Stability of thinned paint is 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guidelines refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guidelines refer HomeSure WallEX Crack Filler TDS)

MIXING

- Dilution: 100% with clean water
- Ensure proper mixing of water in material before application

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4 - 6 hours
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS)
Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean
- Apply again one coat of Mastertouch Prime Interior Primer with proper dilution and allow to dry for 4 - 6 hours before topcoat application
- Application can be done by using brush, roller or spray

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- Only one coat required
- Mastertouch Interior Primer contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



DISTEMPER

Mastertouch Distemper is water thinnable washable acrylic distemper suitable for interior walls. It helps to improve aesthetic appearance of surfaces.

Available in 5, 10 & 20 Kg



FEATURES



Excellent Workability



Good Washability



Good Opacity



Fully Water Based



Free From Heavy Metal



Matt & Smooth Finish

SUBSTRATE

Mastertouch Distemper is suitable on new or previously painted masonry surfaces such as primer surface and semi-permanent interior finishes.

COMPOSITION

- Pigment: Non-lead Pigments
- Extenders: Non-lead Fillers
- Binder: Styrene-Acrylic Emulsion
- Solvent: Water

SHELF LIFE

24 months from date of manufacturing in original tightly closed containers. To be kept away from direct sunlight and excessive heat.

PRODUCT BENEFITS

- Value for Money
- Easy Application
- Eco Friendly
- High Coverage

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	600-650 ml water for 1 Kg.
Application	Brush, Roller Or Spray.
Coverage	85-100 sq.ft./Kg/2 coats(may vary on surface condition).
Drying time	4-6 hours.
Finish	Smooth & Matt.
Stability	Stability of thinned paint is 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WalliEX Ready Mix Plaster (for guidelines refer HomeSure WalliEX Ready Mix Plaster TDS)
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WalliEX Crack Filler (for guidelines refer HomeSure WalliEX Crack Filler TDS)

MIXING

- Dilution: 600-650 ml water for 1 Kg
- Ensure proper mixing of water in material before application

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4 - 6 hours (for guidelines refer Mastertouch Interior Primer TDS)
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS)
Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean
- Apply again one coat of Mastertouch Prime Interior Primer with proper dilution and allow to dry for 4 - 6 hours before topcoat application
- Application can be done by using brush, roller or spray

DISTEMPER APPLICATION PROCESS

- After Primer is applied, apply two coats of Mastertouch Distemper with 60-65% water dilution
- Keep 4-6 hours drying time between two coats
- Application can be done by using brush, roller or spray

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance two coat application is required
- Mastertouch Distemper contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



LUSH EXTERIOR EMULSION

Mastertouch Lush Exterior Emulsion is water-based paint ideal for exterior walls in regions with frequent rain and moderate humidity. Its good quality acrylic binders ensure strong adhesion and long-lasting durability. The formulation resists algae growth and black spots, providing continuous protection while preserving the wall's appearance.

Available in 1, 4, 10 & 20 Lt.



FEATURES



**UV
Resistant**



**Low VOC
Paint**



**Anti-Fungal
Properties**



**Cost-
Effective**



**Film
Breathability**



**Good
Washability**

SUBSTRATE

All kind of well prepared exterior plasters, concrete and masonry surfaces.

COVERAGE

50 - 65 sq. ft. / Lt.. / 2 Coats

(Actual coverage may depend on factors like Surface Preparation, Method of Application & Dilution etc.)

SHELF LIFE

24 months from date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Moderate Washability
- Cost-Effective Solution
- Provides Elegant Matt Look
- Excellent Colour Retention

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	400 - 500 ml of clean water/1 Lt. of emulsion.
Application	Brush, Roller or Spray.
Drying time	Surface Dry: 30 min. Re-Coatability: 4 - 6 hours.
Sheen level	Low.
VOC Content	Low VOC.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guideline refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contamination
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guideline refer HomeSure WallEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Prime Exterior Primer with proper dilution and allow to dry for 4 - 6 hours before topcoat application. (For guideline refer Mastertouch Prime Exterior primer TDS)
- Application can be done by using brush, roller or spray

TOPCOAT EMULSION APPLICATION PROCESS

- After Primer is applied, apply two coats of Mastertouch Lush Exterior Emulsion with 40 - 50% water dilution
- Keep 4 - 6 hours drying time between two coats
(Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray
- Darker shades requires additional third coat for better hiding and appearance

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance two coat application is required
- Lush Exterior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE


- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



LUSH INTERIOR EMULSION

Mastertouch Lush Interior Emulsion is an economical interior wall paint that provides a smooth finish with a rich look. Crafted with quality pigments and acrylic binders, it delivers decent coverage, good colour retention, and resistance to fungus, making it a budget-friendly solution for durable and attractive interiors.

Available in 1, 4, 10 & 20 Lt.

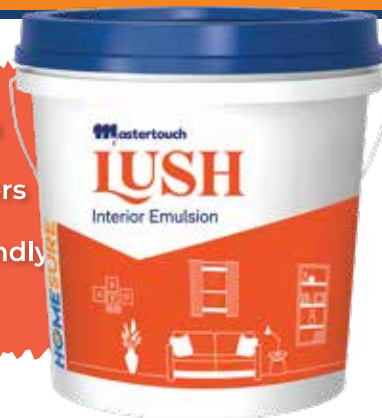

FEATURES



**High
Durability**



**Superior
Whiteness**



**Superior
Aesthetics**



**Cost-
Effective**



**Superior
Coating**



**Eco-
Friendly**

SUBSTRATE

All types of well prepared interior plasters, concrete and masonry surfaces.

COVERAGE

85 - 100 sq. Ft. / Lt. / 2 Coats

(Actual coverage may depend on factors like Surface Preparation, Method of Application & Dilution etc.)

SHELF LIFE

24 months from date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Enhanced Aesthetics
- Cost-Effective Solution
- Durable Performance
- Good Colour Retention

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	400 - 500 ml of clean water/ 1 Lt. of emulsion.
Application	Brush, Roller or Spray.
Drying time	Surface Dry: 30 min. Re-Coatability: 4 hours.
Sheen level	Soft.
VOC Content	Low VOC.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guideline refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contamination
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guideline refer HomeSure WallEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Prime Interior Primer with proper dilution and allow to dry for 4 - 6 hours. (for guideline refer Mastertouch Prime Interior Primer TDS)
- Apply two coats of HomeSure Wall Putty (for guideline refer HomeSure Wall Putty TDS) Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean
- Apply again one coat of Mastertouch Prime Interior Wall Primer with proper dilution and allow to dry for 4 - 6 hours before topcoat application
- Application can be done by using brush, roller or spray

TOPCOAT EMULSION APPLICATION PROCESS

- After Primer is applied, apply two coats of Mastertouch Lush Interior Emulsion with 40 - 50% water dilution
- Take 4 - 6 hours drying time between two coats. (Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray
- Darker shades requires additional third coat for better hiding and appearance

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance two coat application is required
- Mastetouch Lush Interior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



VIVID 2-IN-1 EMULSION

Mastertouch VIVID Shine 2 in 1 Emulsion is a high quality, water-based acrylic emulsion specially formulated for both interior and exterior wall surfaces. It provides a smooth rich sheen finish with excellent coverage, durability, weather resistance, and easy application. The product offers protection against UV rays, fungal and algal growth while maintaining long-lasting appearance and performance.

Available in 1, 4, 10 & 20 Lt.



FEATURES



**Smooth & Stylish
Gloss Finish**



**Excellent
Coverage**



**Excellent
Weather
& UV Resistant**



**Dirt
Resistant**



**Excellent
Adhesion**



**Anti-Fungal &
Anti-Algal
Properties**



**Excellent
Whiteness
& Opacity**



**Low Odour
& Low Voc**



**Easy
Application**



**Good
Washability**

SUBSTRATE

All types of well-prepared interior and exterior plasters, concrete and masonry surfaces.

COVERAGE

Interior: 130-150 Sq. Ft / Lt. / two coats

Exterior: 50-80 Sq. Ft/Lt. / two coats

(Actual Coverage may depend on factors like Surface Preparation, Method of Application, Dilution etc.)

SHELF LIFE

36 months from the date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Rich Aesthetic Look
- Smooth and Matt Finish
- Value for Money
- Easy Application
- Eco Friendly

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Dilution ratio	400 - 500 ml of clean water/ 1 Lt. of emulsion.
Application	By brush, roller or spray.
Drying time	Surface Dry: 30 min. Re Coat-ability: 4 - 6 hours
Sheen level	5-8 at 60° GH, 40-50 at 85° GH
VOC Content	Low VOC.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

For Interior & Exterior Wall

- New masonry surfaces must be allowed to be cured completely. It is recommended to allow 28 days a the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEx Ready Mi Plaster (for guidelines refer HomeSure WallEx Ready Mix Plaster TDS).
- Ensure that the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contamination.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before the application, any crack and minor damage on surface should be repaired with HomeSure WallEx Crack Filler (for guideline refer HomeSure WallEx Crack Filler TDS).

PRIMER APPLICATION PROCESS

Interior Wall

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow it to dry for 4-6 hours. (for guidelines refer Mastertouch Interior Primer TDS)
- Apply two coats of HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS). Ensue surface smoothness and levelling by sanding with sandpaper 180 and wipe clean
- Apply second coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hours before topcoat application
- Application can be done by using brush, roller, spray

Exterior Wall

- Apply one coat of Mastertouch Exterior Primer with proper dilution and allow them to dry for 4-6 hours before topcoat application. (For guideline refer Mastertouch Exterior primer TDS)
- Application can be done by using brush, roller, spray

TOPCOAT EMULSION APPLICATION PROCESS

Interior & Exterior Wall

- After primer is applied, apply two coats of Mastertouch VIVID Shine 2in1 Emulsion with 40-50% water dilution.
- Wait for 4-6 hours drying time between the two coats. (Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller, spray
- For darker shades apply additional third coat for better hiding and appearance

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance apply two coats of Mastertouch VIVID Shine 2in1 Emulsion
- Mastertouch Vivid Interior Shine 2in1 Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint.

POST PAINTING CARE

- For the best performance of Mastertouch VIVID Shine 2in1 Emulsion, ensure proper washing and cleaning of algae and fungal growth
- Washing should be done at regular interval of six months

हर रंग में
मोहे **रंग** दे!

अपने घर और जिंदगी में लाएं **Vivid** का जादू

VIVID EXTERIOR EMULSION

Mastertouch Vivid Exterior Emulsion is a high quality modified acrylic emulsion specially designed for use in dry or less humid climate & provides good algae & fungal resistance. It has a special anti-peel formula that gives excellent resistance against chalking & peeling. Available in 1, 4, 10 & 20 Lt.



FEATURES



**Rich & Smooth
Matt Finish**



**Water
Resistant**



**Anti Peel
Formula**



**Anti Fungal
Protection**



**Good
Washability**



**Free from
Heavy Metal**

SUBSTRATE

All kind of well-prepared exterior plasters, concrete and masonry surfaces.

COVERAGE

50 - 70 sq. ft. / Lt. / 2 Coats

(Actual coverage may depend on factors like Surface Preparation, Method of Application & Dilution etc.)

SHELF LIFE

36 months from the date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Rich Aesthetic Look
- Smooth and Matt Finish
- Value for Money
- Easy Application
- Eco Friendly

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	750 ml of clean water/ 1 Lt. of emulsion.
Application	Brush, Roller or Spray.
Drying time	Surface Dry: 30 min. Re - Coatability: 6 - 8 hours.
Sheen level	2 - 3 at 60° GH.
VOC Content	Low VOC.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WalliEX Ready Mix Plaster (for guidelines refer HomeSure WalliEX Ready Mix Plaster TDS)
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WalliEX Crack Filler (for guidelines refer HomeSure WalliEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Exterior Primer with proper dilution and allow to dry for 4 - 6 hours before top coat application. (For guidelines refer Mastertouch Exterior Primer TDS)
- Application can be done by using brush, roller or spray

TOPCOAT EMULSION APPLICATION PROCESS

- After Primer is applied, apply two coats of Mastertouch Vivid Exterior Emulsion with 75% water dilution
- Keep 6 - 8 hours drying time between two coats
(Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray
- Darker shades requires additional third coat

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance two coat application is required
- Mastertouch Vivid Exterior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure regular and proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular interval of six months



हो जा रंगीला

अपने घर और जिंदगी में लाएं Vivid का जादू

VIVID INTERIOR EMULSION

Mastertouch Vivid Interior Emulsion is a water-based acrylic emulsion paint that offers a smooth matt finish to the walls. It gives high opacity and long-lasting paint film.

Available in 1, 4, 10 & 20 Lt.



FEATURES



**Smooth & Stylish
Matt Finish**



**Excellent
Whiteness & Opacity**



**Excellent
Coverage**



**Anti
Chalking**



**Good
Washability**



**Free From
Heavy Metal**

SUBSTRATE

All types of well-prepared interior plasters, concrete and masonry surfaces.

COVERAGE

100 - 120 sq. ft. / Lt. / 2 Coats

(Actual coverage may depend on factors like Surface Preparation, Method of Application & Dilution etc.)

SHELF LIFE

36 months from the date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Rich Aesthetic Look
- Smooth and Matt Finish
- Value for Money
- Easy Application
- Eco Friendly

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Free Flowing Liquid.
Dilution ratio	400 - 500 ml of clean water/ 1 Lt. of emulsion.
Application	Brush, Roller or Spray.
Drying time	Surface Dry: 30 min. Re - Coatability: 4 - 6 hours.
Sheen level	2 - 3 at 60° GH.
VOC Content	Low VOC.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guidelines refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guidelines refer HomeSure WallEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4 - 6 hours. (for guidelines refer Mastertouch Interior Primer TDS)
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS)
Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean
- Apply again one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4 - 6 hours before topcoat application
- Application can be done by using brush, roller or spray

TOPCOAT EMULSION APPLICATION PROCESS

- After Primer is applied, apply two coats of Mastertouch Vivid Interior Emulsion with 40 - 50% water dilution
- Take 4 - 6 hours. drying time between two coats
(Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray
- Darker shades requires additional third coat

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance two coat application is required
- Mastertouch Vivid Interior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular interval of six months

*Shades that
define you*

BLOOM EXTERIOR EMULSION

Mastertouch Bloom Exterior Emulsion is a premium exterior emulsion. It is formulated with unique Stay Clean Technology (SCT) to withstand harsh environmental conditions like rainfall, humidity, and heat. Bloom Exterior Emulsion comes with a rich sheen finish, it magnifies the beauty of your house.

Available in 1, 4, 10 & 20 Lt.



FEATURES



**Dust
Proof**



**Excellent
Shine**



**Excellent
Coverage**



**Anti-Fungal
& Anti-Algal**



**UV
Protection**



**Free from
Heavy Metal**

SUBSTRATE

All types of well-prepared interior plasters, concrete, and masonry surfaces.

COVERAGE

50 - 60 sq. ft. / Lt. / 2 Coats

(Actual coverage may depend on factors like Surface Preparation, Method of Application & Dilution, climate condition etc)

SHELF LIFE

36 months from date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Dust Proof Technology
- Very high Washability and Scrub Resistant
- Ease of Application
- Rich Sheen Finish
- 5 years Performance Warranty

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Viscous Liquid.
Dilution ratio	400 ml of clean water/ 1Lt. of emulsion.
Application	Brush, Roller or Spray.
Drying time	Surface Dry: 30 min. Re - Coatability: 4 - 6 hours.
Sheen level (for White Shade)	2 - 3 at 60° GH, 15-20 at 85° GH.
VOC Content	Low VOC.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WalliEX Ready Mix Plaster (for guideline refer HomeSure WalliEX Ready Mix Plaster TDS)
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WalliEX Crack Filler (for guideline refer HomeSure WalliEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Exterior Primer with proper dilution and allow to dry for 4-6 hours before topcoat application. (For guideline refer Mastertouch Exterior primer TDS)
- Application can be done by using brush, roller, spray

TOPCOAT EMULSION APPLICATION PROCESS

- After Primer is applied, apply two coats of Mastertouch Bloom Exterior Emulsion with 40% water dilution
- Keep 6 - 8 hours drying time between two coats
(Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray
- Darker shades requires additional third coat

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance two coat application is required
- Mastertouch Bloom Exterior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth
- Washing should be done at regular intervals of six months



*Shades that
define you*

BLOOM INTERIOR EMULSION

Mastertouch Bloom Interior Emulsion is a water-based emulsion well formulated with properties like sheen, anti-fading, anti-fungus. Bloom interior emulsion has a long-lasting film that keeps your house good for years. It provides a smooth sheen finish in reasonable price.

Available in 1, 4, 10 & 20 Lt.



FEATURES



**Stain Guard
Technology**



**Scrub
Resistant**



**Super
Acrylic Quality**



**Anti-Fungal
& Anti-Algal**



**Excellent
Shine**



**Free from
Heavy Metal**

SUBSTRATE

All types of well-prepared interior plasters, concrete, and masonry surfaces.

COVERAGE

120 - 140 sq. ft. / Lt. / 2 Coats

(Actual coverage may depend on factors like Surface Preparation, Method of Application & Dilution etc.)

SHELF LIFE

36 months from date of manufacture in original tightly closed container.

PRODUCT BENEFITS

- Stain Guard Technology
- Very high Washability and Scrub Resistant
- Smooth finish with Mid Sheen
- Ease of Application
- Excellent Coverage
- 3 years Performance Warranty

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Viscous Liquid.
Dilution ratio	500 ml of clean water/ 1Lt. of emulsion.
Application	Brush, Roller or Spray.
Drying time	Surface Dry: 30 min. Re - Coatability: 4 - 6 hours.
Sheen level	2 - 3 at 60° GH, 20-30 at 85° GH.
VOC Content	Low VOC.
Stability of thin paint	To be used within 24 hours.

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guideline refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water
- Before application, any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guideline refer HomeSure WallEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hours. (for guideline refer Mastertouch Interior Primer TDS)
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS)
Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean
- Apply again one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4 - 6 hours before topcoat application
- Application can be done by using brush, roller or spray

TOPCOAT EMULSION APPLICATION PROCESS

- After Primer is applied, apply two coats of Mastertouch Bloom Interior Emulsion with 50% water dilution
- Take 4 - 6 hours drying time between two coats. (Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray
- Darker shades requires additional third coat

USAGE PRECAUTIONS

- Do not alter water addition than recommended level
- For better performance two coat application is required
- Mastertouch Bloom Interior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling Paint

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of walls to remove algae and fungal growth
- Washing should be done at regular intervals of six months



WATERLOCK EXPERT

HomeSure Mastertouch Waterlock Expert Powered by Ultra Elastic Technology for Long-Lasting Wall Protection HomeSure Mastertouch Waterlock Expert is a premium, next generation waterproof coating formulated with resilient acrylic polymers and reinforcing synthetic fibres to form a seamless durable membrane offering superior waterproofing, excellent flexibility, and crack bridging ability. Specially engineered for exterior walls can be used both as protective and water proofing coating on building roof, terraces, parapet sunshades and vertical walls. With a 10-year system warranty, Mastertouch Waterlock Expert relieves you from seepage problems and helps reduce indoor temperature by up to 8°C. Available in 4, 10 & 20 Lt.



FEATURES



**Excellent
Crack Bridging**



**Exceptional Elongation
Up To 800%**



**No Need
For Hacking**



**Temperature
Reduction By 8°C**



**Superior
Water Resistant**



**Ease Of
Application**

COVERAGE

On Horizontal surface	0.80-1.00 m ² /Lt.
For Fresh painting on Vertical surface	1.90-2.40 m ² /Lt.
For Repainting on Vertical surface	2.60-3.20 m ² /Lt.

STORAGE

Store in dry and well-ventilated place, away from heat source & direct sunlight.

SHELF LIFE

36 months from the date of manufacturing when stored in proper condition.

Note: Coverage depends on surface profile, texture, and porosity.

PRECAUTIONS

- Surface preparation is a must before application (Refer TDS)
- Maintain 4 - 6 hours of drying time after each coat of application
- Do not apply during rain or extreme temperatures.
- Use hand gloves, safety goggles while using
- Keep out of children's reach

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Viscous liquid.
Composition	Acrylic emulsion, selected filler & additives.
Specific gravity at 27°C	1.18 - 1.22.
Non-volatile content %	46 - 50%.
pH	8 - 10.
Viscosity, KU	120 - 135.
Water permeability (DIN 1048 PART - 5)	Up to 10 bar pressure.
Dry adhesion strength	> 1.5 MPa.
Tensile strength	1.50 MPa ± 0.15 MPa.
Elongation %	> 800
Water Vapor Permeability Test (ASTM D1653 - 13)	Up to 2gm/m ³ /day
Surface Temperature Reduction (ASTM D 4803 - 2018)	Up to 8°C.
SRI (%)	Upto 100.
Crack Bridging Ability (EN 1062 - 7)	1.15 ± 0.12.

APPLICATION

- Prior to application of HomeSure Mastertouch Waterlock Expert, all surfaces must be prepared properly to avoid failure
- New masonry surfaces must be allowed to be cured completely. It is recommended to allow 28 days as the curing time for new masonry surfaces
- Clean loose particles, dirt, grease, and traces of foreign materials from the surface, if necessary, by using wire brush/sandpaper or by chipping and the surface should be properly clean with water
- Cracks up to 3mm must be filled with HomeSure WallEx Crack Filler. Bigger cracks, damaged portions and hollow areas must be repaired with polymer modified cement mortars

Horizontal Surface:

- For self-priming dilute the material with 3:1 proportion (3 - part HomeSure Mastertouch Waterlock Expert to 1 - part water) and apply it on the concrete surface
- Allow 4 - 6 hours of drying after priming. Apply two coats of undiluted HomeSure Mastertouch Waterlock Expert, maintaining a 4 - 6 hours interval between coats
- Ensure the second coat is applied perpendicular to the first coat

Vertical Surface:

A) For Fresh Painting – First apply self-priming coat prepared with 3 - part HomeSure Mastertouch Waterlock Expert to 1 - part water, then apply second coat of undiluted HomeSure Mastertouch Waterlock Expert in a span of 4 - 6 hours.

(B) For Repainting – On previously painted surfaces apply single coat of undiluted HomeSure Mastertouch Waterlock Expert.

Topcoat: - As per desired shade apply two coats of HomeSure Exterior Emulsion paint in a span of 4 - 6 hours.

Tested according to ASTM D1653-13, ASTM D 4803-2018, EN 1062-7



WATERLOCK

HomeSure Mastertouch Waterlock is an acrylic polymer based waterproofing protective coating formulated with selected elastomeric, resilient acrylic polymers and reinforcing synthetic fibres. Post application when cured it forms a seamless durable membrane thus offering ultimate waterproofing. It can be used as a waterproofing coating on roofs, terraces, parapet walls, sunshades and vertical walls.

Available in 4, 10 & 20 Lt.



FEATURES

-  **Ease of Application**
-  **No Need Of Hacking**
-  **Good Water Resistant**
-  **Excellent Grip**
-  **Free from Heavy Metal**

STORAGE:

Store in cool, dry & well-ventilated place, away from heat source & direct sunlight.

COVERAGE

On Horizontal surface	0.8 - 1 m ² /Lt.
For Fresh painting on Vertical surface	1.9 - 2.4 m ² /Lt.
For Repainting on Vertical surface	2.6 - 3.2 m ² /Lt.

Note: Coverage depends on surface texture & porosity.

SHELF LIFE

36 months from the date of manufacturing when stored in proper condition.

PRECAUTIONS

- Surface preparation is must before application
- Allow to dry for 4 - 6 hours after each coat of applications
- Don't apply during rain or extreme temperature
- Use hand gloves, safety goggles while using
- Keep out of children reach

TECHNICAL DATA	
PARAMETERS	SPECIFICATIONS
Nature	White Viscous liquid.
Composition	Acrylic emulsion, selected filler additives.
Specific gravity at 27°C	1.28 ± 0.02
Non-volatile content %	50 - 55%
pH	8 - 10
Water permeability (up to 4 bar pressure)	Passes.
Dry adhesion strength, mpa	> 1.5
Tensile strength mpa	> 2 MPa
Elongation %	> 200

APPLICATION

- Prior to application of HomeSure Mastertouch Waterlock, all surfaces must be prepared properly to avoid failure
- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces to gain maximum output
- Clean loose particles, dirt, grease, and traces of foreign materials from the surface, if necessary, by using wire brush / sand paper or by chipping and the surface should be properly clean with water
- Cracks up to 3mm must be filled with HomeSure Crack Filler. Bigger cracks, damaged portions and hollow areas must be repaired with polymer modified cement mortars

Horizontal Surface: For self-priming dilute the material with 3:1 proportion (3 - parts of Waterlock to 1 - part of Water) & apply on the concrete surface

- After 3 - 5 hours of priming apply two coats of undiluted HomeSure Mastertouch Waterlock with 4 - 6 hours span in each coat

Vertical Surface:

- A) For Fresh Painting** – First apply self-priming coat prepared with 3 - part HomeSure Mastertouch Waterlock : 1 - part water, then apply second coat of undiluted HomeSure Mastertouch Waterlock in a span of 4 - 6 hours.
- (B) For Repainting** – On previously painted surfaces apply single coat of undiluted HomeSure Mastertouch Waterlock.
- Topcoat: - As per desired shade apply two coats of Homesure Mastertouch Emulsion paint in a span of 4 - 6 hours.

Tested according to ASTM D 412, EN 1015-12, IS 2645 & Internal test method




UNIVERSAL STAINER

Mastertouch Universal Stainer is a high-strength colour concentrate designed for on-site and in-plant tinting of base paints to achieve a wide range of shades. It is suitable for tinting water-based emulsions and air-drying synthetic alkyd enamels. Not recommended for Epoxy, Polyurethane, Chlorinated Rubber, Stoving or Allied Coating Systems.



AVAILABLE SHADES

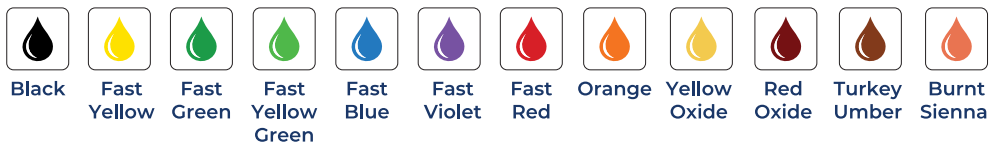

FEATURES



High tinting strength



Excellent colour reproducibility



Works with White & Base Paints



Easy and hassle-free mixing



Less settling of pigments



Consistent shade development

SHELF LIFE

24 months from the date of manufacturing when stored in proper condition.

STORAGE

Store in a cool, dry place, away from direct sunlight, excessive heat and frost. Always keep container tightly closed and upright.

PRECAUTIONS

- Refer **Material Safety Data Sheet (MSDS)** before the use of the product
- Use the product as per the guidance given in the TDS
- Wear suitable protective equipment during handling
- Keep out of children's reach
- No added **Lead, Mercury, or Chromium** compounds

TECHNICAL DATA	
PROPERTIES	SPECIFICATIONS
Appearance	Smooth and free flowing liquid
Viscosity	55-100 KU (KU Viscometer)
Recommended dosage	Max. 5% by volume (Excess dosage may affect film properties and performance)
Finish	As per base paint
Coverage	Not applicable
Packaging available	50 ml, 100 ml, 200 ml

APPLICATION GUIDELINES

- Shake the container well before use
- Add small quantity of stainer to base white paint
- Always add stainer before thinning the paint
- Mix thoroughly using spatula or mechanical stirrer
- Do not exceed 5% (v/v) of total paint volume
- For non-company base paints, a trial mix is recommended to ensure compatibility



HOMESURE
MasterTouch

Vivid
Exterior Emulsion

Walplast®

बना दे जिंदगी
सतरंगी रे!

अपने घर और जिंदगी में लाएं
Vivid का जादू



Available in
1, 4, 10 & 20 Lt.



RICH & SMOOTH
MATT FINISH



GOOD
WASHABILITY



WATER
RESISTANT



ANTI-PEEL &
ANTI-FUNGAL PROPERTIES



EXCELLENT COVERAGE,
WHITENESS & OPACITY

Inspiration Meets Colour

☎ 1800 3000 6650

HOMESURE
MasterTouch

Vivid
Interior Emulsion

बना दे जिंदगी —
सतरंगी रे!

अपने घर और जिंदगी में लाएं
Vivid का जादू

Available in
1, 4, 10 & 20 L


RICH & SMOOTH
MATT FINISH


GOOD
WASHABILITY


WATER
RESISTANT


ANTI-PEEL &
ANTI-FUNGAL PROPERTIES


EXCELLENT COVERAGE,
WHITENESS & OPACITY

Inspiration Meets Colour

1800 3000 6650

HOMESURE
MasterTouch

Bloom

Walplast®

Where the walls define your unique identity



*Shades that
define you*



EXCELLENT
COVERAGE & OPACITY



ANTI-FUNGAL
& ANTI-MICROBIAL



LONG LASTING
WEATHER-PROOF SOLUTION

Available in 1, 4, 10, 20Lt.



www.walplast.com

HOMESURE
MasterTouch

Bloom

Walplast®

Where every brush stroke reflects your choice



*Shades that
define you*



EXCELLENT
COVERAGE & OPACITY



ANTI-FUNGAL
& ANTI-MICROBIAL



LONG LASTING
WEATHER-PROOF SOLUTION

Available in 1, 4, 10, 20Lt.



www.walplast.com

HOMESURE
Mastertouch

Walplast

ज़िंदगी के
हर रंग
ज़ियो!



HOMESURE
Mastertouch
Prime

HOMESURE
Mastertouch
LUSH
Interior Emulsion

रहो शान से



SUPERIOR FINISH



RICH COLOUR



LONG LASTING

AVAILABLE IN 1, 4, 10 & 20Lt.

HOMESURE घर बनाए खास, दिलाए विश्वास!

ज़िंदगी के
हर रंग
जियो!



HOMESURE
Mastertouch
Prime

HOMESURE
Mastertouch
LUSH
Interior Emulsion

रहो शान से



SUPERIOR FINISH



RICH COLOUR



LONG LASTING

AVAILABLE IN 1, 4, 10 & 20Lt.

HOMESURE घर बनाए खास, दिलाए विश्वास!



**EXCELLENT CRACK
BRIDGING**



**TEMPERATURE
REDUCTION UPTO 8°C**



SUPERIOR PROTECTION



**POWERED BY
ULTRA
ELASTIC
TECHNOLOGY**



**सीपेज की
समस्या Gone!**

Base coat for surface protection + elastic membrane for water-proofing solution.
For System Warranty, refer our website: www.walplast.com

☎ 1800 3000 6650 | 🌐 www.walplast.com | [f](#) [X](#) [@](#) [v](#) [in](#)

Wall Putty | Tile Adhesives | Gypsum Boards & Plasters | Decorative Paints | Admixtures | Walling Solutions

HOMESURE घर बनाए खास, दिलाए विश्वास!



Easy Application

Strong Adhesion

Excellent Water Resistance

Superior Elongation
for Bridging Cracks

**Single application,
multiple* solution.**



सीपेज की
समस्या **Gone!**

*Base coat for surface protection + elastic membrane for water-proofing solution.
*For System Warranty, refer our website www.walplast.com

☎ 1800 3000 6650 | 🌐 www.walplast.com | [f](#) [t](#) [@](#) [v](#) [in](#)

Wall Putty | Tile Adhesives | Gypsum Boards & Plasters | Decorative Paints | Admixtures | Walling Solutions

HOMESURE® घर बनाए खास, दिलाए विश्वास!

HOMESURE Master touch

दीवारों के हीवाने



Walplast Products Pvt. Ltd., ISO 9001:2015 Certified Company
Plot No A, 246, Cross Road Number 18, T.T.C. Industrial Area, MIDC
Industrial Area, Mahape, Navi Mumbai, Maharashtra-400 710.

📞 www.walplast.com 📧 sales@walplast.com ☎ 1800 3000 6650.

FOLLOW
US ON



SCAN FOR
MORE DETAILS

